

GH-LR



150x200 GHE-R 27x0,9									
mm	0°	45°	60°	45°	60°	mm	0°	45°	60°
150	110	x	x	x	x	170-140	110-120	x	x
									
3x400V 50 Hz 0,6 / 0,8 40/75 2060-20x0,9 160 L B Hmin Hmax V 1100 600 1400 1750 950									



220x250 GH-R 27x0,9									
mm	0°	45°	60°	45°	60°	mm	0°	45°	60°
220	160	90	x	x	x	230-150	160-90	90-90	230-120
									
3x400V 50 Hz 0,75 / 1,1 30/65 2450-27x0,9 235 L B Hmin Hmax V 1410 600 1490 1750 950									



230x280 GH-LR 27x0,9									
mm	0°	45°	60°	45°	60°	mm	0°	45°	60°
230	190	120	185	x	x	280-220	180-170	120-90	180-120
									
3x400V 50 Hz 0,9 / 1,1 35/70 2720-27x0,9 305 L B Hmin Hmax V 1600 890 1320 1950 787									



260x280 GH-LR 27x0,9									
mm	0°	45°	60°	45°	60°	mm	0°	45°	60°
255	215	126	195	x	x	280-250	200-120	135-110	178-160
									
3x400V 50 Hz 0,9 / 1,4 35/70 2970-27x0,9 320 L B Hmin Hmax V 1750 890 1360 1950 787									



300x320 GH-LR 27x0,9									
mm	0°	45°	60°	45°	60°	mm	0°	45°	60°
300	300	200	270	x	x	320-290	300-280	190-200	270-200
									
3x400V 50 Hz 1,3 / 1,8 35/70 3660-27x0,9 605 L B Hmin Hmax V 2050 1170 1480 2180 800									

SHI-LR



230x280 SHI-LR 27x0,9									
mm	0°	45°	60°	45°	60°	mm	0°	45°	60°
230	190	120	185	x	x	280-220	180-170	120-90	180-120
									
3x400V 50 Hz 1,5 20-100 2720-27x0,9 420 L B Hmin Hmax V 1860 1050 1370 1780 790									



260x280 SHI-LR 27x0,9									
mm	0°	45°	60°	45°	60°	mm	0°	45°	60°
255	215	126	195	x	x	280-250	200-120	135-110	178-160
									
3x400V 50 Hz 1,5 20-100 2970-27x0,9 420 L B Hmin Hmax V 1900 1050 1390 1850 795									



300x320 SHI-LR 27x0,9									
mm	0°	45°	60°	45°	60°	mm	0°	45°	60°
300	300	200	270	x	x	320-290	300-280	190-200	270-200
									
3x400V 50 Hz 2,4 20-100 3660-27x0,9 650 L B Hmin Hmax V 2050 1170 1420 2040 800									



360x500 SHI-LR 34x1,1									
mm	0°	45°	60°	45°	60°	mm	0°	45°	60°
360	360	300	360	300	x	500-350	420-300	300-200	420-260
									
3x400V 50 Hz 3,0 20-100 4780-34x1,1 740 L B Hmin Hmax V 3000 1080 1470 2340 812									



460x600 SHI-LR 41x1,3									
mm	0°	45°	60°	45°	60°	mm	0°	45°	60°
460	460	320	460	320	x	600-460	470-240	330-180	470-250
									
3x400V 50 Hz 4,0 20-100 5380-41x1,3 1195 L B Hmin Hmax V 3200 1140 1630 2660 800									

A-CNC-R



230x280 A-CNC-R 27x0,9									
mm	0°	45°	60°	45°	60°	mm	0°	45°	60°
230	180	110	x	x	x	280-200	180-170	100-70	x
									
3x400V 50 Hz 1,5 20-100 2720-27x0,9 780 L B Hmin Hmax V 2305 2260 1405 1780 800									








300x320 A-CNC-R / A-CNC-RH 27x0,9									
mm	0°	45°	60°	45°	60°	mm	0°	45°	60°
300	290	200	x	x	x	320-290	260-280	180-170	x
									
3x400V 50 Hz 2,4 20-100 3660-27x0,9 904 L B Hmin Hmax V 2410 1920 1503 2020 800									






360x500 A-CNC-R 34x1,1									
mm	0°	45°	60°	45°	60°	mm	0°	45°	60°
360	360	300	x	x	x	500-360	440-240	290-280	x
									
3x400V 50 Hz 3,0 20-100 4780-34x1,1 1500 Lmin Lmax Bmin Bmax Hmin Hmax V 2165 2940 2580 2600 1455 2340 800									




ROLLER TABLES / DRÁHY























	S (mm)	Vmin (mm/s)	Vmax (mm/s)
R	290	760	980
R	390	760	980




Model	S (mm)	Vmin (mm/s)	Vmax (mm/s)
VD-2000/520/60/6	520	250	6
VD-2000/620/89/6	620	350	6
230-RDP	290	200	4
230-RDZ	290	200	4
300x320 RDP / RDZ 1000/350	350	1000	5
300x320-RDP	390	350	4
300x320-RDZ	390	350	4
360/460-RDR	450	850	4
360/460-RDL	450	850	4
RD 1000/290	290	200	4
RD 1000/390	390	350	4
RD 2000/290	290	350	6
RD 2000/390	390	350	6
RDT 1000/350	350	1000	3
RDT1 1000/520	520	2100	3
RDT1 1000/620	620	2500	3
RDT 2000/350	350	1000	5
RDT1 2000/520	520	2100	6
RDT1 2000/620	620	2500	6
RDM1 2000/520	520	2100	6
RDM1 2000/620	620	2500	6
RDM1-L 2000/520	520	2100	6
RDM1-L 2000/620	620	2500	6
RDH-450	450	700	1
RDH-600	600	700	1
RDH-800	800	700	1
RDH-1150	1150	1000	1

ODMĚŘOVÁNÍ / MEASURING




PEGAS - GONDA s.r.o.
 Čs. armády 322, 684 01 Slavkov u Brna
 CZECH REPUBLIC
 00420 544 221 125(6) | pegas@gonda.cz

www.pegas-gonda.cz



2025

340 KATANA

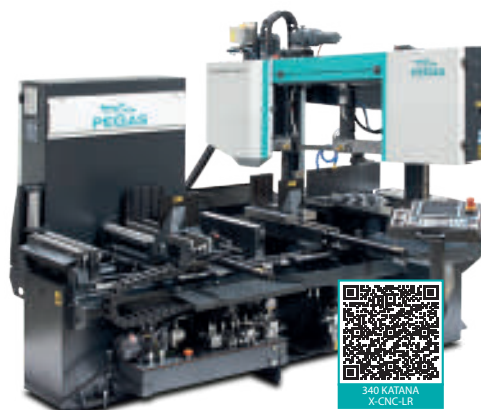

340 KATANA SERVO / X-CNC-LR		34x1,1
350	350	350
500x340	500x340	500x340
3x400V 50 Hz	2,4	20-100
Lmin	Lmax	Bmin
2500	3030	2720
3150	1870	2000
800		

400 PROFI




400 PROFI A-CNC		34x1,1
400	400x400	400x220
3x400V 50 Hz	3,0	20-100
L	Bmin	Bmax
2525	1530	2150
1870	2250	800

300 HERKULES



300x300 HERKULES X-CNC		34x1,1
300	300x300	300x220
3x400V 50 Hz	3,0	20-100
Lmin	Lmax	Bmin
2230	2510	1450
2280	1800	800

HORIZONTAL

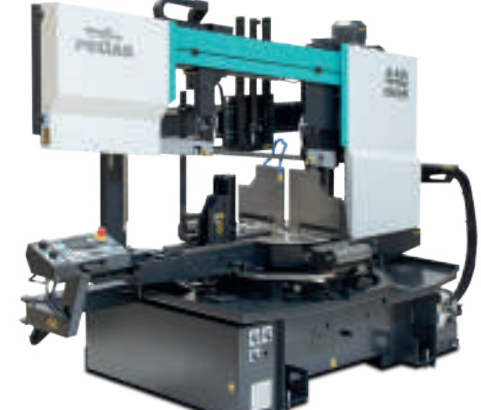

440 HORIZONTAL SHI / X		34x1,1
440	430	290
610x385	430x385	290x385
3x400V 50 Hz	4,0	15-150
Lmin	Lmax	Bmin
3311	4160	1756
2118	2225	810




440 HORIZONTAL A-CNC / X-CNC		34x1,1
440	430	290
610x385	430x385	290x385
3x400V 50 Hz	4,0	15-150
Lmin	Lmax	Bmin
3311	4160	6010
2168	2225	810



540 HORIZONTAL SHI / X		41x1,3
540	510	350
750x490	510x490	350x490
3x400V 50 Hz	5,5	15-150
Lmin	Lmax	Bmin
3480	4696	1756
2400	2510	810



540 HORIZONTAL X-CNC / A-CNC		41x1,3
540	510	350
750x490	510x490	350x490
3x400V 50 Hz	5,5	15-150
Lmin	Lmax	Bmin
3480	4696	6013
2400	2510	810

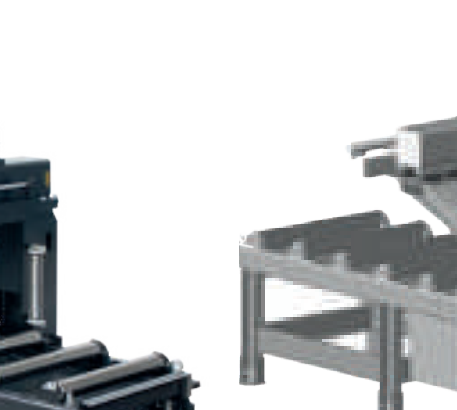



540 HORIZONTAL X-CNC-M		41x1,3
540	510	350
750x490	510x490	350x490
3x400V 50 Hz	5,5	15-150
Lmin	Lmax	Bmin
3480	4470	6010
2183	2511	810

600 HORIZONTAL





600x1100 HORIZONTAL X		54x1,6
620	650	490
1100x600	730x600	480x600
3x400V 50 Hz	5,5	20-100
Lmin	Lmax	Bmin
4350	5050	2060
2650	3000	800

ROLLER TABLES / DRÁHY

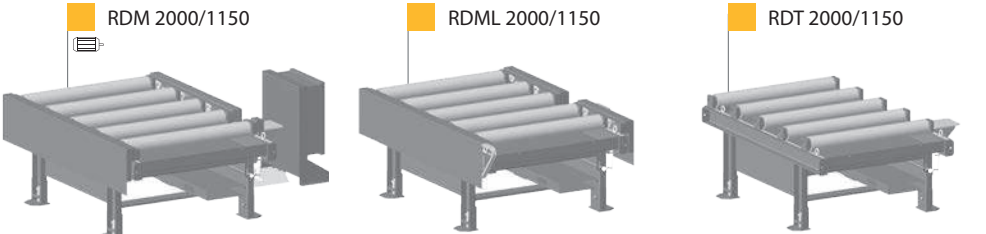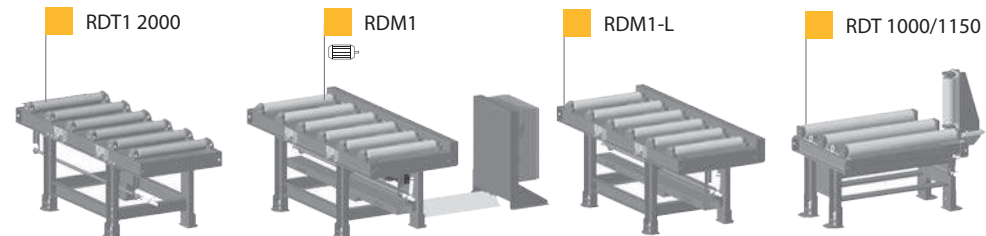

	mm	mm	mm
VD-2000/800/89/6	800	350	6
540 RDR/RDL	620	850	4
440 RDR/RDL	620	850	4
RDT 1000/350	350	2100	3
RDT1 1000/520	520	2100	3
RDT1 1000/620	620	2500	3
RDT1 1000/800	800	4200	3
RDT 1000/1000	1000	5000	3
RDT 1000/1150	1150	2800	3
RDT 2000/350	350	1000	5
RDT1 2000/520	520	2100	6
RDT 2000/620	620	2500	6
RDT1 2000/800	800	4200	6
RDT 2000/1000	1000	5000	6
RDT 2000/1150	1150	2800	5
RDML 2000/350	350	2100	5
RDM1 2000/520	520	2100	6
RDM1 2000/620	620	2500	6
RDM1 2000/800	800	2700	6
RDM1 2000/1000	1000	6200	6
RDM 2000/1150	1150	2800	5
RDML 2000/350	350	2100	5
RDML-L 2000/520	520	2100	6
RDML-L 2000/620	620	2500	6
RDML-L 2000/800	800	2700	6
RDML 2000/1000	1000	6200	6
RDML 2000/1150	1150	2800	5
TDT 1000/570	570	4000	3
TDT 2000/570	570	4000	6
TDT 2000/800	800	7000	6
TDT 2000/1000	1000	8000	6
TDT 2000/1400	1400	7000	8

PŘÍČNÝ DOPRAVNÍK RDT-XY / CROSS-CONVEYORS RDT-XY

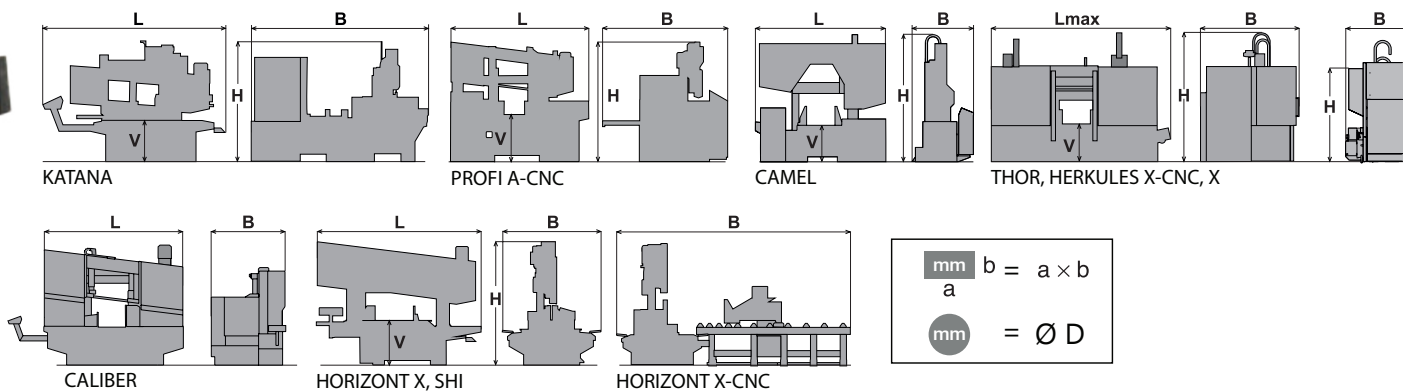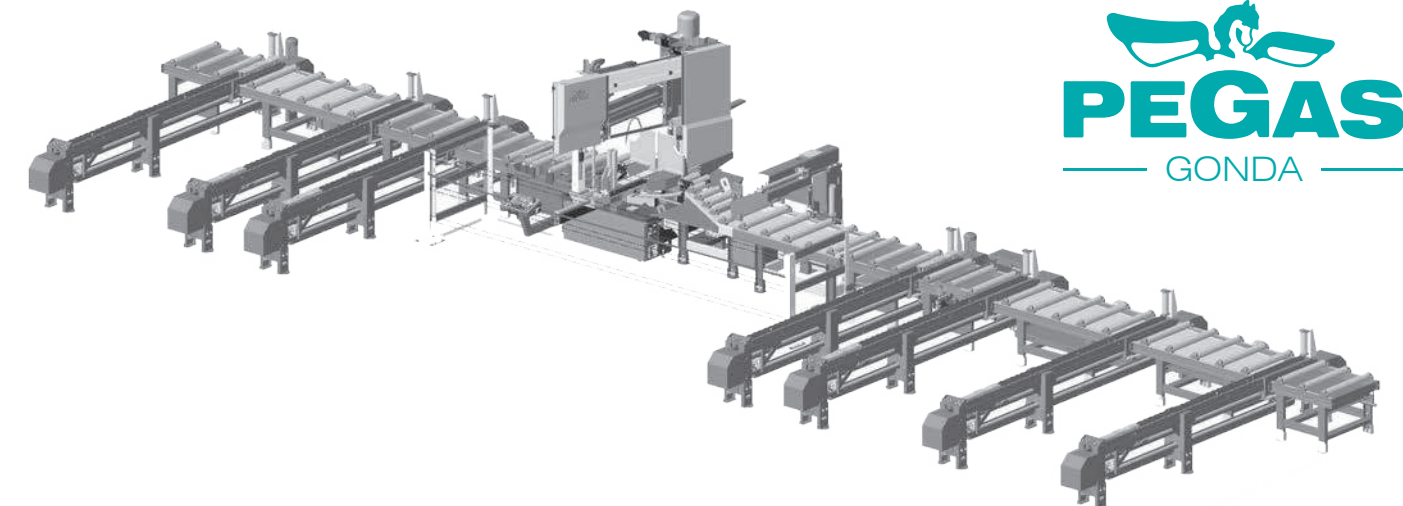

$$\frac{mm}{a} = \frac{b}{\varnothing D}$$

CALIBER



440 CALIBER A-CNC / SHI		34x1,1
440	460x400	460x400
3x400V 50 Hz	4,0	15-150
Lmin	Lmax	Bmin
3070	3875	1950
2080	2190	800



440 CALIBER X-CNC / X		34x1,1
440	460x400	460x400
3x400V 50 Hz	4,0	15-150
Lmin	Lmax	Bmin
3070	3875	1950
2150	2190	800



444 CALIBER X-CNC / A-CNC		41x1,3
440	500x400	500x400
3x400V 50 Hz	5,5	15-150
Lmin	Lmax	Bmin
3700	4116	2030
2390	2522	800



540 CALIBER A-CNC / SHI		41x1,3
550	550x500	550x460
3x400V 50 Hz	5,5	15-150
Lmin	Lmax	Bmin
3700	4116	2030
2390	2522	800



540 CALIBER X-CNC / X		41x1,3
550	550x500	550x460
3x400V 50 Hz	5,5	15-150
Lmin	Lmax	Bmin
3700	4116	2030
2390	2522	800



540 CALIBER X-CNC-2M / A-CNC-2M		41x1,3
550	550x500	550x460
3x400V 50 Hz	5,5	15-150
Lmin	Lmax	Bmin
3600	4300	3400
2420	2550	800

CAMEL



1000 CAMEL X / X-CNC-4M		54x1,6
1000	1000x960	1000x650
3x400V 50 Hz	7,5	20-100
L	B	Hmin
4750	2020	2560
3700	815	3700
5050	7200	2960
3700	815	3700

THOR



THOR 4		54x1,3
450	450x450	450x300
3x400V 50 Hz	9,0	20-150
Lmin	Lmax	Bmin
3300	3630	2100
2340	2590	800



THOR 5		54x1,6
550	620x550	620x350
3x400V 50 Hz	15,0	15-150
Lmin	Lmax	Bmin
3740	3940	2200
2580	2930	800


HERKULES



700x750 HERKULES X		67x1,6
700	750x700	750x460
3x400V 50 Hz	11,0	15-80
Lmin	Lmax	Bmin
4000	5550	2010
2670	3050	615



700x750 HERKULES X-CNC		67x1,6
700	750x700	750x460
3x400V 50 Hz	11,0	15-80
Lmin	Lmax	Bmin
4350	5700	2010
2500	2390	2800

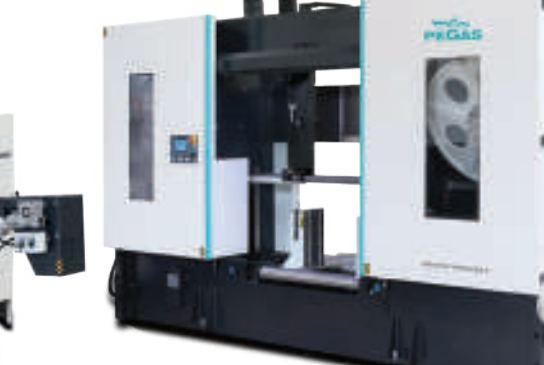

850x1000 HERKULES X		67x1,6
850	1000x850	1000x460
3x400V 50 Hz	11,0	15-80
Lmin	Lmax	Bmin
4460	6000	2000
2820	3260	620



850x1000 HERKULES X-CNC		67x1,6
850	1000x850	1000x460
3x400V 50 Hz	11,0	15-80
Lmin	Lmax	Bmin
4760	6280	3140
3830	2820	3260



1200x1400 HERKULES X		80x1,6
1200	1200x1400	1200x680
3x400V 50 Hz	11,0	15-80
L	B	Hmin
5200	2700	2850
4100	760	